


Blade Visible Draught Dispenser		
dispensing	Beer flow	1.6 litre per minute
	Beer in glass temperature	2 -3 dgC
cooling	Max working conditions to reach all specs	38dC / 75% RH
	Loading full kegs	Pre-cooled at 2-4 dC (commercial fridge) Not included
set-up	Power supply	230V/ 50Hz-60Hz or 127 V/60Hz (check rating plate)
	Power consumption	70 Watt
	Dispense Tap	only suitable for Brewlock kegs with disposable beer line
	Power cable	2 mtr
	Protection class	I
	Climate class	SN / N / ST
	External dimensions (H x W x D)	590 x 290 x 471 mm (h x w x d) including driptray
	Air pump	Pressure setting: 1.3 - 1.5 barg.
	Drip tray	content 500 ml
	Illumination of keg	LED
	Outer cabinet materials	stainless steel
	Keg	8 ltr Brewlock keg with disposable beer tube Box dimensions 209 x 215 x 381 mm
	Keg storage	1 keg only
	Noise level	<70 dB(A)
	Weight	16.24 kg (appliance) 1.59 kg (dome) (26 kg including 8 ltr keg)
manual	Manual	Hard copy supplied with each appliance. Manuals available on website
sustainability	refrigerant (type and quantity)	Hydro Carbon (R600A); 12g
	Packaging	100% recyclable (100% carton only). On the outside packaging labels with serial numbers and EAN code will be mounted. Appliance Dimensions : 426 x 370 x 474 mm Dome Dimensions : 284 x 284 x 295 mm
Tenability	Beer keg activated in the appliance	30 days after connection the beer keg
I.P rating	appliance	For indoor use only (IP23)
Approvals		CE, CB and EMC for 230V 50/60Hz

GEN. SPEC





BLADE
BREWLOCK COUNTERTOP
DRAUGHT SYSTEM

DIMENSIONS & WEIGHT APPLIANCE



Dimensions (mm) – 471 x 290 x 589 (DxWxH)

Weight – 17.8 kgs

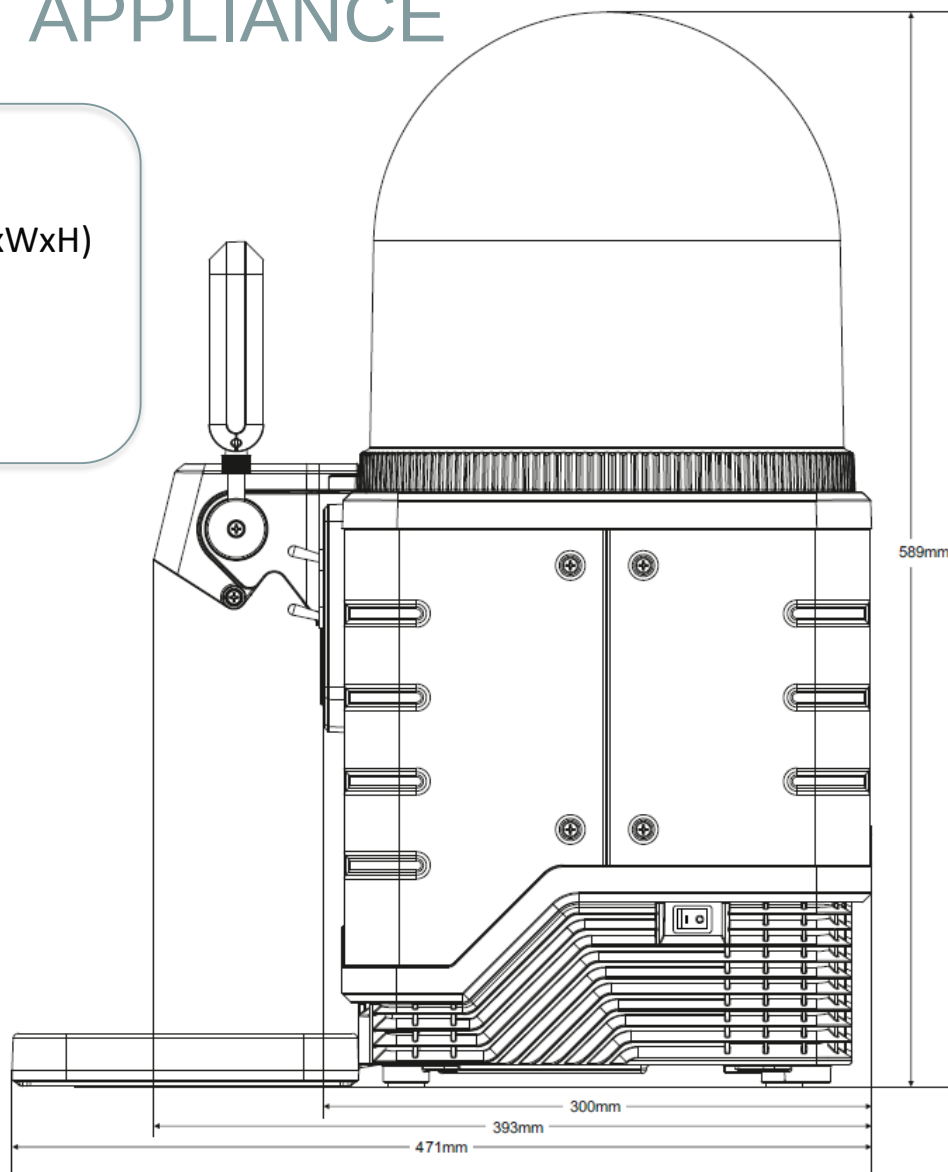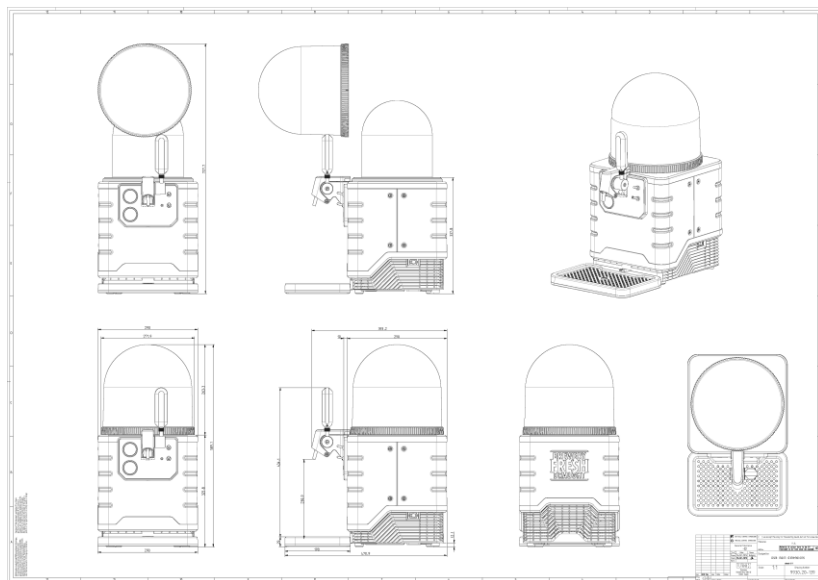

BLADE
BREWLOCK COUNTERTOP
DRAUGHT SYSTEM